



**COUDE A 2 BRIDES ET A PATIN PN16  
CONDE DE REDUCTION A 2 BRIDES PN16**

Marque INJEQ®

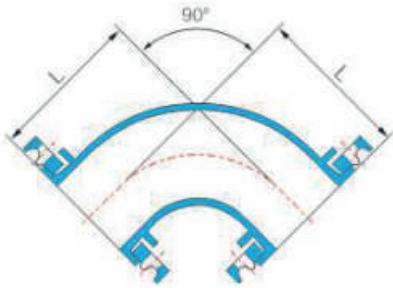


DN	L	Kg
60	160	8,30
80	165	11,10
100	180	14,20
125	200	19,60
150	220	26,40
200	260	33,90
250	350	67,30
300	400	87,60
400	500	126,00


DN	L	Kg
60	160	7,90
80	130	12,10
100	140	13,00
125	150	16,80
150	160	21,40
200	180	32,60
250	245	56,30
300	275	77,60
400	324	106,00



DY/DN	L	Kg
60/50	50	3,00
80/60	55	3,66
100/60	90	4,80
100/80	90	5,00
125/60	120	9,00
125/80	100	10,50
125/100	130	14,00
150/60	130	18,00
150/80	110	20,00
150/100	110	23,00
150/125	135	23,00
200/100	130	24,00
200/150	120	28,00
250/150	130	28,50
250/200	130	29,00
300/150	135	30,00
300/200	200	42,00
300/250	260	54,00
400/200	135	30,00
400/250	200	42,00
400/300	260	54,00



DN	L	H	Kg
60	160	100,00	11,00
80	165	110,00	14,00
100	180	125,00	17,70
125	200	140,00	22,00
150	220	160,00	30,50
200	260	190,00	47,00
250	350	225,00	76,00
300	400	255,00	108,00
400	500	320,00	196,00



Normes, Poids et mesures, croquis indicatifs  
Dimensions en mm  
Nous consulter pour tous diamètre > à 400