

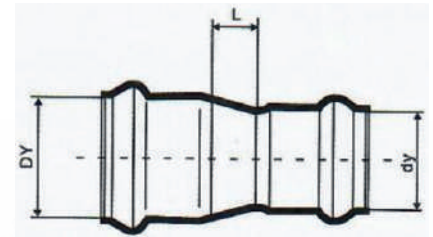


CONE DE REDUCTION A 2 EMBOITEMENTS POUR TUYAUX PVC BRIDE ET BOUCHON A EMBOITEMENT POUR TUYAUX PVC



DY/DN	L	Kg
63/65	100	4,00
75/65	100	4,30
90/80	120	4,60
110/100	130	5,60
125/125	145	7,00
160/150	175	10,00
200/200	195	15,00
225/200	200	16,50
250/250	210	25,50
315/300	240	35,00
400/400	280	54,00

DY/DN	L	Kg
75/63	50	3,00
90/75	55	3,66
110/75	90	4,80
110/90	90	5,00
160/90	120	9,00
160/110	100	10,50
200/110	130	14,00
200/160	130	18,00
225/160	110	20,00
225/200	110	23,00
250/160	135	23,00
250/200	130	24,00
250/225	120	28,00
315/200	130	28,50
315/225	130	29,00
315/250	135	30,00
400/250	200	42,00
400/315	260	54,00



DY/DN	L	Kg
63	100	2,20
75	100	2,30
90	120	3,60
110	130	5,00
125	155	7,00
160	175	9,50
200	195	12,00
225	200	14,50
250	210	18,00
315	240	29,00
400	280	33,00

Marque INJEQ®

Normes, Poids et mesures, croquis indicatifs

Dimensions en mm

Nous consulter pour tous diamètre > à 400